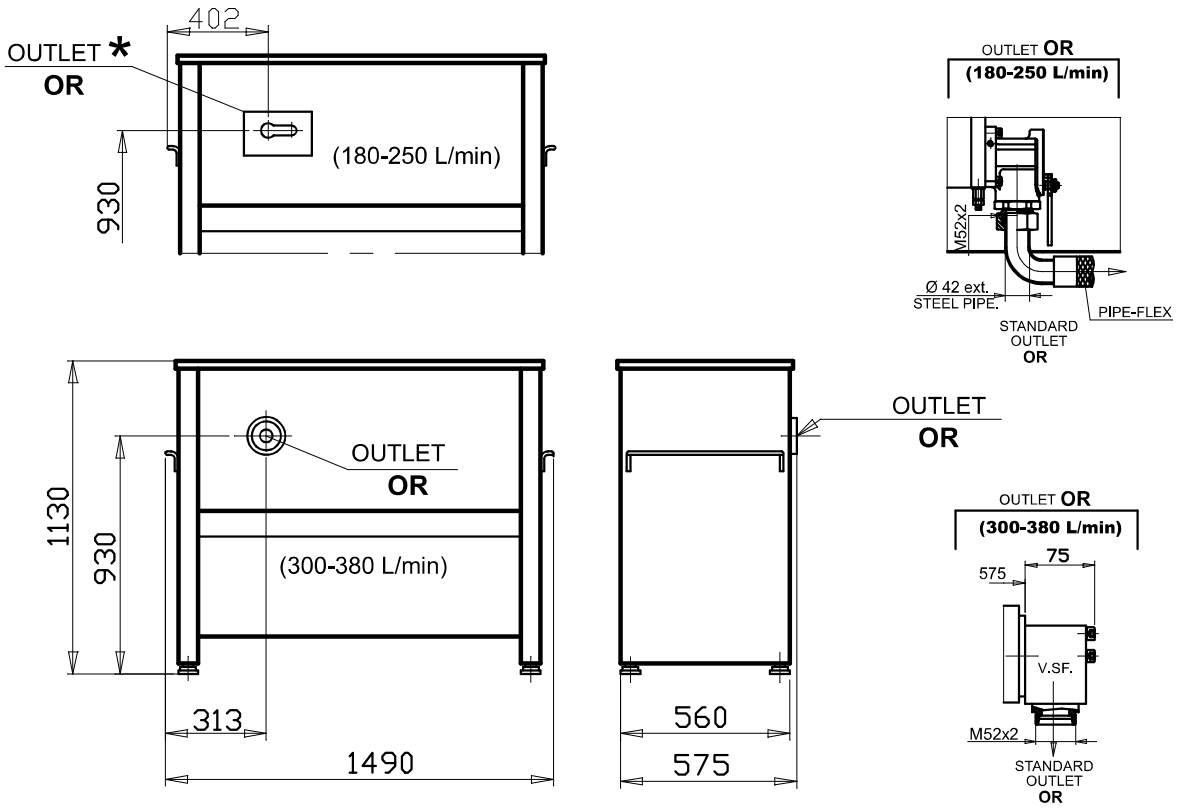

THREE-PHASE MOTOR: DA 10 / 50 CV (7.4 / 37 kW)
230 V-400 V-415 V ; (50/60 HZ)

PUMP: DA 150 / 380 L/1'

PRESSURE: DA 12 / 45 BAR

OIL QUANTITY	
MINIMUM LEVEL	160 litres
USEFUL OIL	310 litres
TOTAL OIL	470 litres

POWER UNIT WEIGHT WITHOUT OIL	315 KG

NOTES:

- MORIS S.r.l. ALWAYS RECOMMENDS THE USE OF A STAR/DELTA STARTING FOR ENGINES WITH A POWER 16 Hp (12 Kw)
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET WITH FLEX-PIPE 1"1/2 (M52x2) (steel pipe ø42mm)
- HEAT EXCHANGER ARRANGEMENT (OPTIONAL)

UT			DATA SHEET POWER UNIT CA/A	DATE 03/24
				DWG Nr. 9211/CA/A

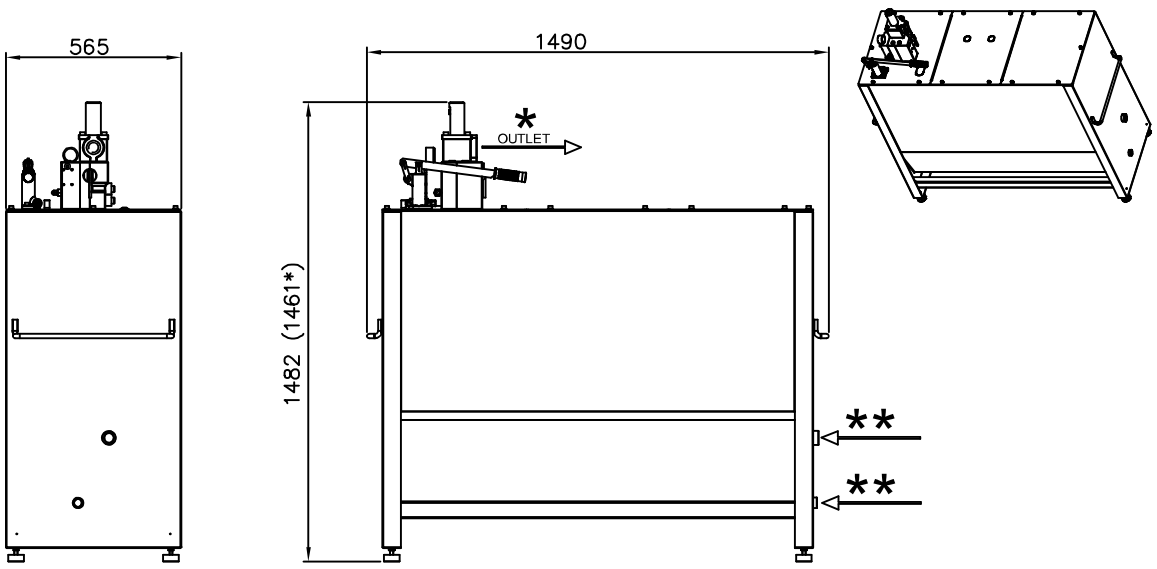

THREE-PHASE MOTOR: From 13 up to 50 CV (9.5 / 37 kW)
230 V-400 V-415 V ; (50/60 HZ)
PUMP: From 180 up to 380 L/min.
PRESSURE: From 12 up to 60 BAR

OIL QUANTITY	
MINIMUM LEVEL	160 litres
USEFUL OIL	310 litres
TOTAL OIL	470 litres

POWER UNIT WEIGHT WITHOUT OIL	315 KG

NOTE:

- DISTRIBUTOR: LRV-175; LRV-350
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET (*) WITH FLEX-PIPE 1" (M36x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET (*) WITH FLEX-PIPE 1"1/4 (M45x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET (*) WITH FLEX-PIPE 1"1/2 (M52x2) FOR PUMP From 180 L/min. up to 380 L/min.
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT		DATA SHEET POWER UNIT CA/A-LRV	DATE 10/24 DWG Nr. 9018/CA/A-LRV

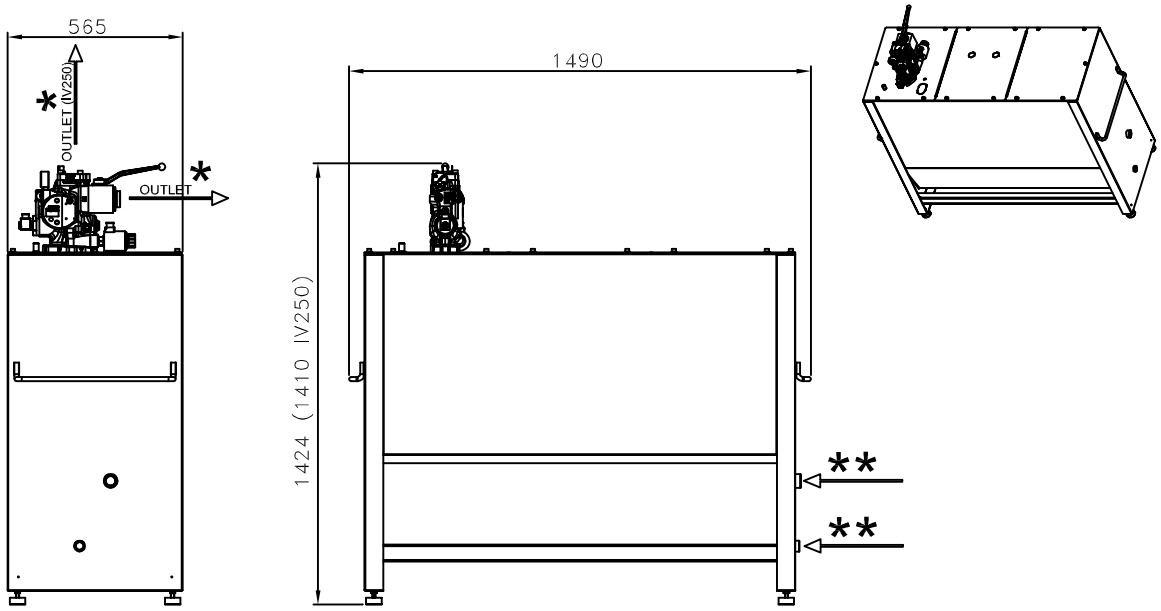

THREE-PHASE MOTOR: From 13 up to 50 CV (9.5 / 37 kW)
230 V-400 V-415 V ; (50/60 HZ)
PUMP: From 180 up to 380 L/min.
PRESSURE: From 12 up to 60 BAR

OIL QUANTITY	
MINIMUM LEVEL	160 litres
USEFUL OIL	310 litres
TOTAL OIL	470 litres

POWER UNIT WEIGHT WITHOUT OIL	315 KG

NOTE:

- DISTRIBUTOR: I-VALVE 250/250; I-VALVE 500/500
- REF TABLE N° 9017, TO CHOOSE PUMP AND POWER MOTOR
- OUTLET WITH FLEX-PIPE (*) 1" (M36x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET WITH FLEX-PIPE (*) 1"1/4 (M45x2) FOR PUMP From 35 L/min. up to 150 L/min.
- OUTLET WITH FLEX-PIPE (*) 1"1/2 (M52x2) FOR PUMP From 180 L/min. up to 380 L/min.
- HEAT EXCHANGER ARRANGEMENT (** OPTIONAL)

UT		DATE 11/18
	DATA SHEET POWER UNIT CA/A-IV	DWG Nr. 9018/CA/A-IV

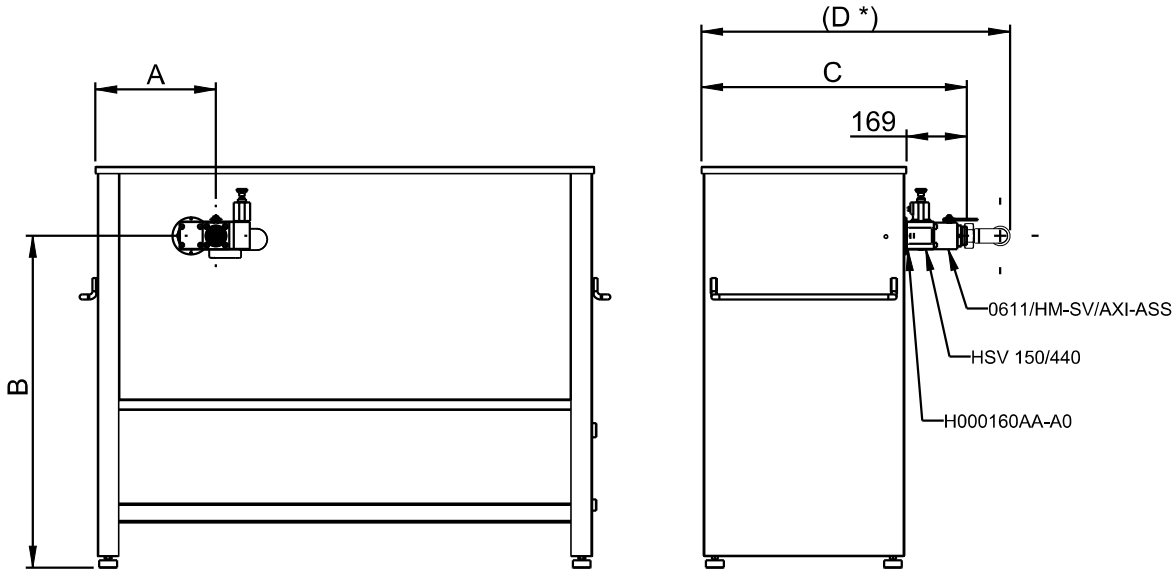

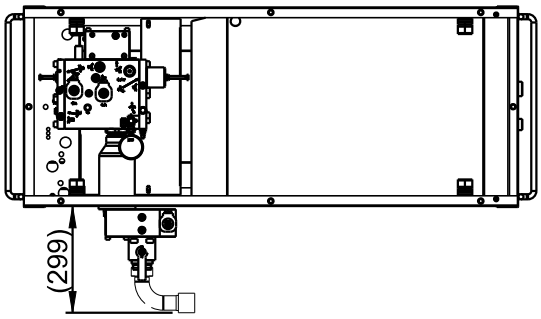

* QUOTA CON ATTACCO TUBOFLEX 90° 1"1/2 MORIS
DIMENSION WITH TUBOFLEX CONNECTION 90° 1"1/2 MORIS

CENTRALINA / POWER UNIT	A	B	C	D
CA (300-380 L/min)	383	930	745	866
CA/A (300-380 L/min)	383	930	745	866
CG	383	1060	944	1065
CG/XL	383	1360	944	1065

UT	DIMENSIONI CENTRALINE - POWER UNIT DIMENSION CA;CA/A;CG;CG/XL + HSV 150/440	DATA 04/08/25 N DIS. TAV00000082-A0
MORIS		
TAV00000082-A0-IT/EN		